

Assembly Guide - Wall Mounted Heater Guard Kits

The following guide will provide general instructions for assembling a Heater Guard Kit. A heater guard kit is recommended by the manufacturer to prevent burning yourself on the heater.

Material Included:

- 2x2 Legs, 2pcs for a 2-sided guard, and 3pcs for a 3-sided guard
- 1x3 fencing, 3pcs at 24" for the front, and 3pcs at 18" for the side. (6pcs for 3-sided guard)

· Trimming to size


- One of the 2x2 legs is to be cut into half, to anchor on the wall. The other legs can be trimmed to the height of the heater.
- The 1x3 fencing can be trimmed to length based on the minimum clearance of the heater

Assembly

- Space the fencing pieces at regular intervals, with one end on the wall side, and one on the leg. Attach fencing with brad nails, or wood staples. Repeat with the other sides.
- Once all sides are assembled, stand the heater quard in the desired location, anchor to the wall.

Variations

- A Full Cedar heater guard is available, with 1x3 and 1x6 cedar planks running up to 36" height, with a cedar cap on the top.
- One of the fencing pieces can be installed on the top as a cap pieces, to create a small ledge.
- Fencing can be installed with a 45-degree miter to avoid rough edges

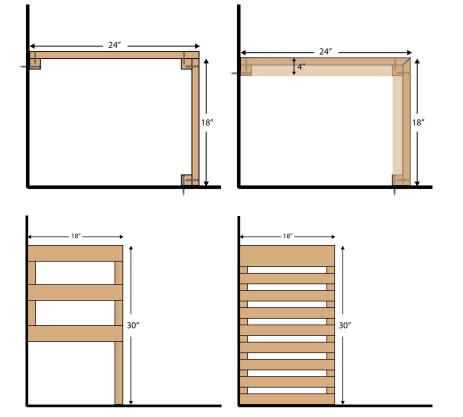

Top View: : Shows screw location and sizes. Second picture shows an optional cap piece with 45° Miter.

Side View: Trim to Height of Heater. Second picture shows optional Full Cedar Heater Guard.